
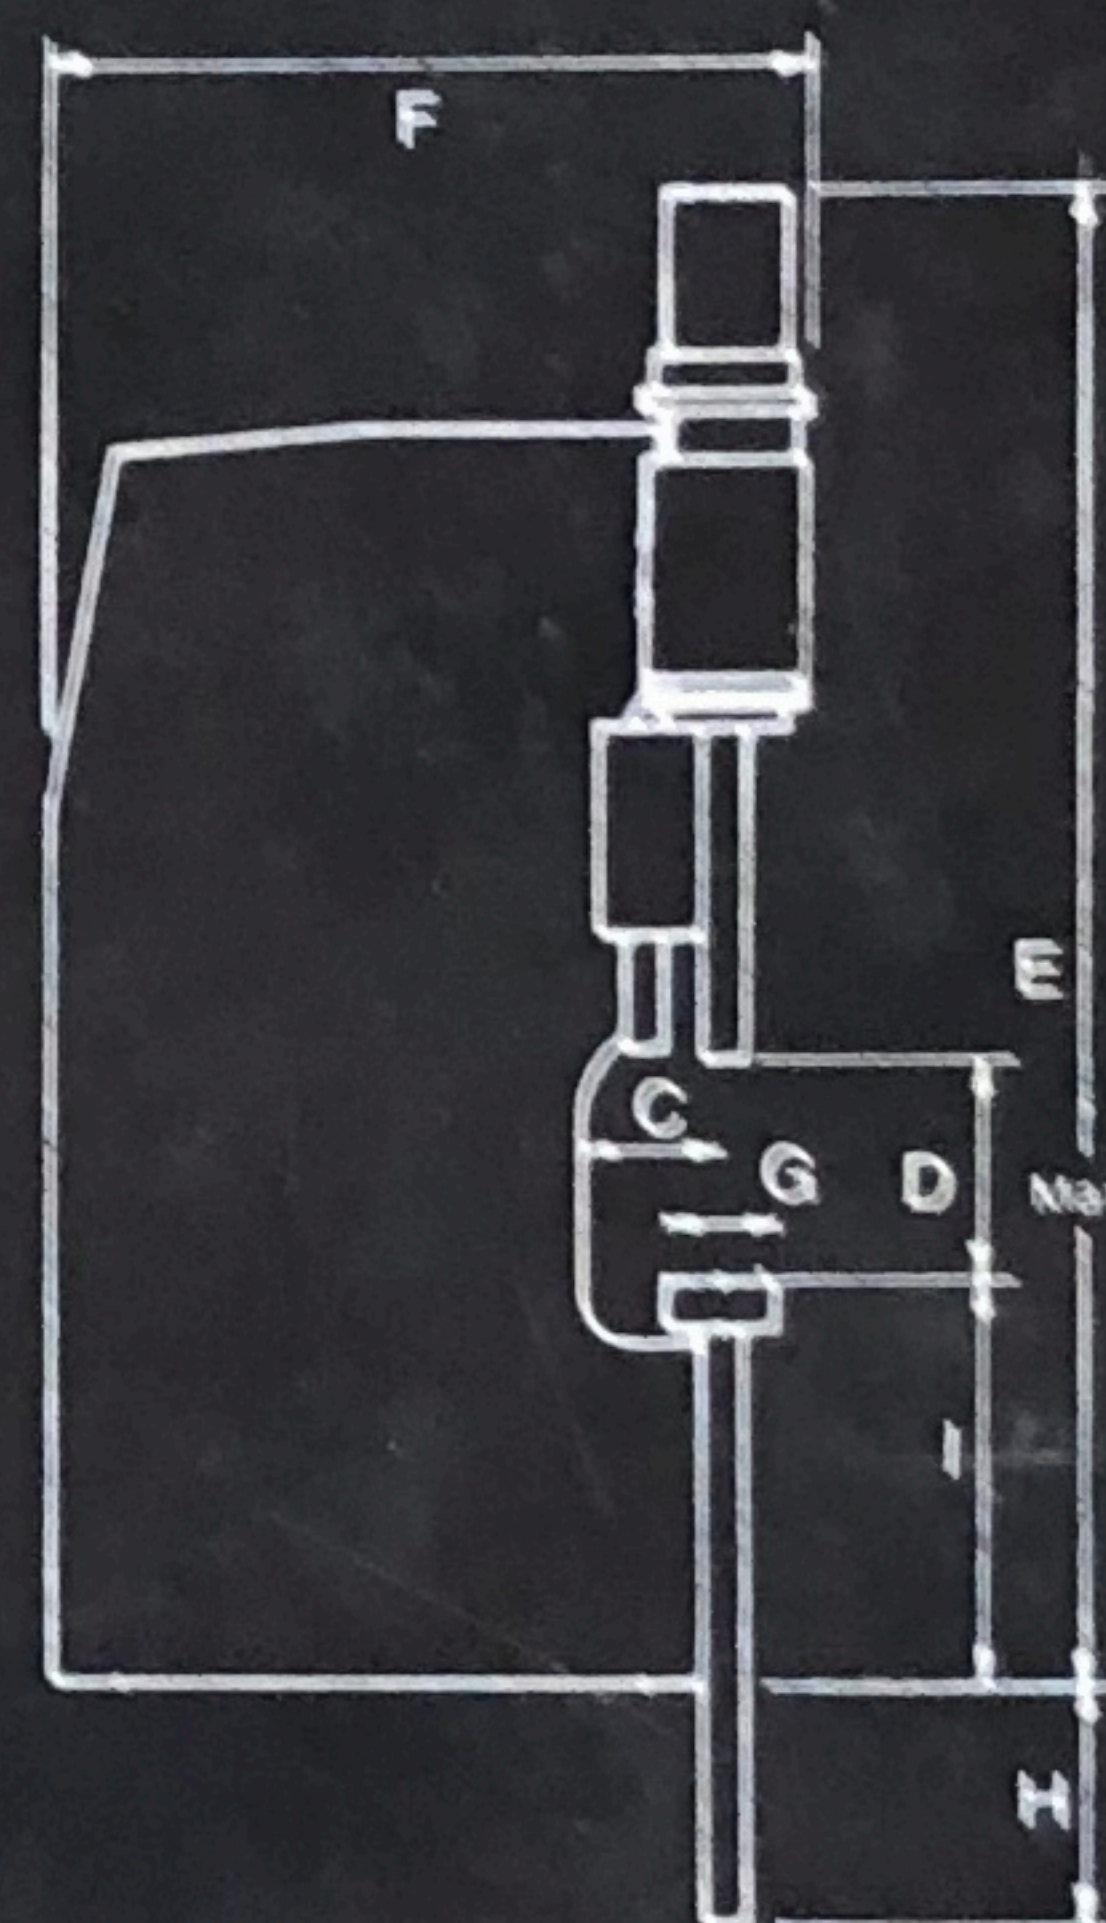


Technische Daten

Blech stärke	6	8	10	12	16	20	24	32	40	50	60	80	100	125	160	200	250	300
	4,5	6	7	2,5	11,5	14	17	22,5	28	35	42	56	70	88	112	140	175	210
	1	1,3	1,6	2	2,5	3,5	4	5,5	6,5	8,5	10	13	16	20	26	33	42	50
0,5	3																	
0,75	7	5																
0,9	10	7	6															
1	12	9	7	6														
1,25		14	11	9	7													
1,5		20	16	14	10	8												
2				24	18	14	12											
2,5					28	22	19	14										
3						32	26	20	16									
4								35	28	23								
5									44	35	30							
6										50	42	32						
8											75	56	45					
10												88	70	56				
13													118	95	74			
16														143	112	90		
20															175	140	112	
25																220	175	150

V-Öffnung
kleinster Abkantschenkel
Innenradius

Presskraft in Tonnen pro Meter Biegen

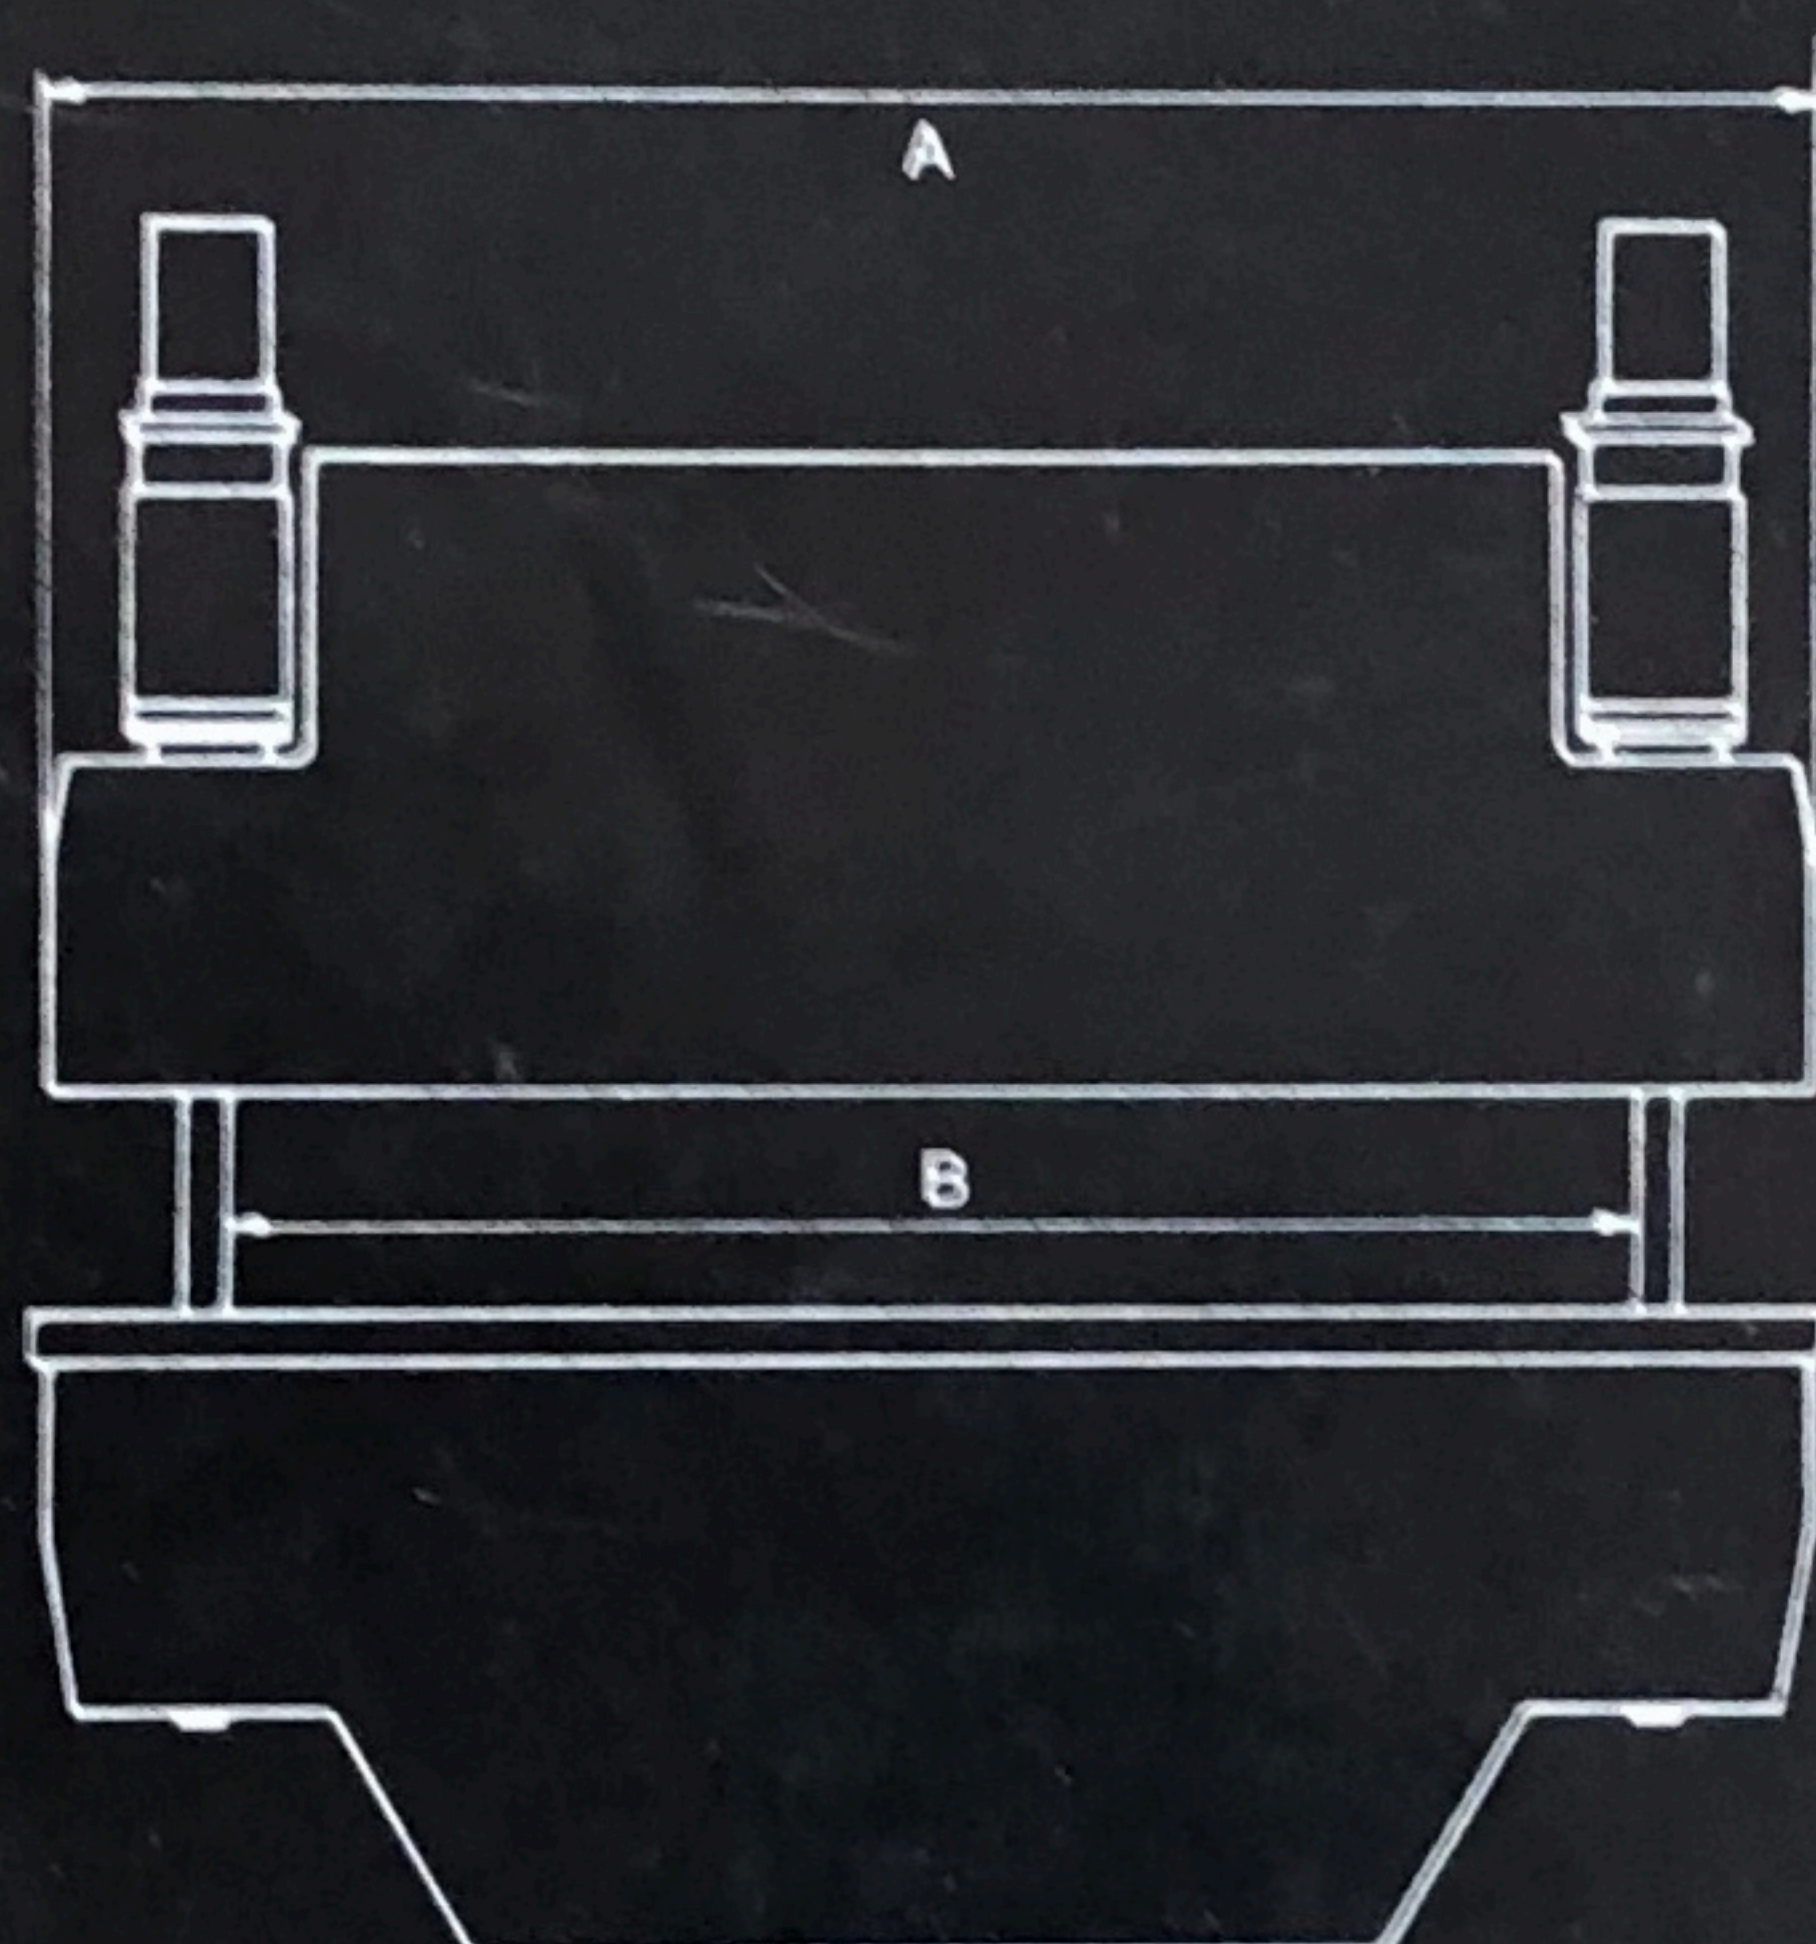

Type SK	Max. Druck in Tonnen	Motor- leistung PS	Anzahl der Zylinder	Max. Hublänge mm	Anschlag- verstellung in mm	Geschwindigkeit			Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
						Anlauf mm/sek.	Biegen mm/sek.	Rücklauf mm/sek.										
35 - 2050	35	4	2	110	70	100	9	55	2600	2050	1550	250	290	2240	1100	100		900
50 - 2050	50	5,5	2	110	70	100	9	50	3700	2050	1550	250	290	2240	1100	100		900
50 - 2550	50	5,5	2	110	70	100	9	50	4200	2550	2050	250	290	2240	1100	100		900
80 - 2550	80	7,5	2	160	110	100	8	50	6600	2550	2050	250	380	2670	1225	160		900
80 - 3100	80	7,5	2	160	110	100	8	50	7500	3100	2550	250	380	2670	1225	160		900
110 - 3100	110	10	2	160	110	100	8	50	9000	3100	2550	250	380	2680	1295	160		900
110 - 4300	110	10	2	160	110	100	8	50	11500	4300	3200	250	380	2680	1295	160	280	900
150 - 3100	150	15	2	210	120	100	7	55	12700	3100	2550	300	440	2960	1555	160	280	900
150 - 4300	150	15	2	210	120	100	7	55	15500	4300	3200	300	440	2960	1555	160	380	900
225 - 3200	225	20	2	260	175	100	7	50	17000	3200	2550	300	515	3395	1695	250	360	900
225 - 4300	225	20	2	260	175	100	7	50	20000	4300	3200	300	515	3395	1695	250	550	900
300 - 3200	300	25	2	260	175	60	7	45	21000	3200	2550	300	510	3450	1900	250	500	900
300 - 4300	300	25	2	260	175	60	7	45	25000	4300	3200	300	510	3450	1900	250	500	900
450 - 4300	450	40	2	300	200	60	6	45	38000	4300	3200	400	745	3800	2300	250	850	900